

EBT


Linear High Bay

Ecosparks solution emphasize on long lifespan, higher fixture efficacy, and smart control. With intelligent smart sensors such as motion sensor, daylight sensor, PIR sensor and wireless control, the lighting system can be efficient and cost effective.


The high power LED Linear Highbay solution brings the most superior efficient and uniform light distribution. It is ideal for warehouse, sports hall, and distributions center that require mounting height up to 12 meter. Through our advanced thermal management, our Light engine is proven to live longer comparing to others.



Technical Specification

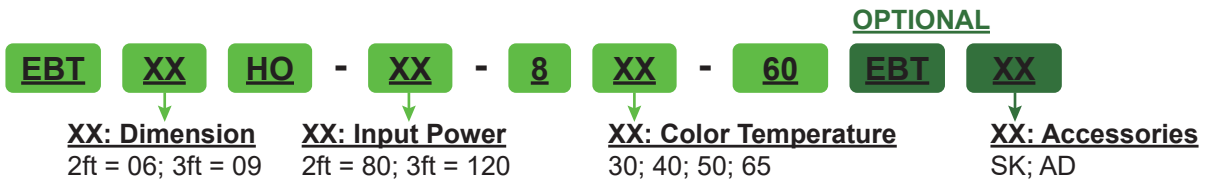

ON / OFF								
Input Power	Model Code	Accessories	CCT	Color Temperature	CRI	System Lumen	System Efficacy	Beam Angle
80W (2ft)	EBTXXHO-XX-8XX-60 <small>(Only for ceiling mounted)</small>	SK- Suspension AD- Adjustable	3000K	Warm White Cool White Daylight	>80	9800lm @ 5000K	123lm/W @ 5000K	60°
120W (3ft)	EBTXXHO-XX-8XX-60EBTXX <small>(Only for suspension and adjustable)</small>		4000K			5000K	6500K	

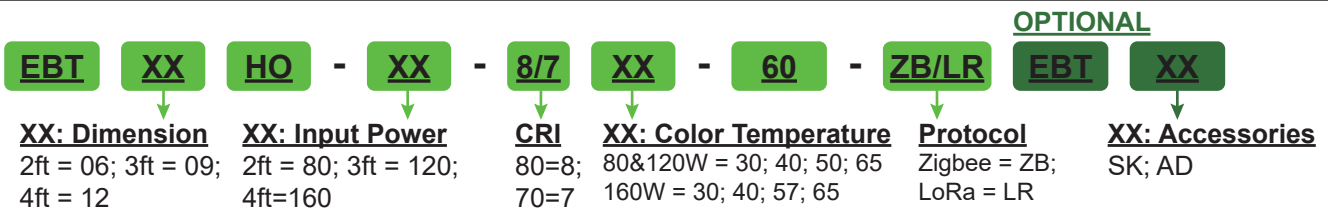


DIMMABLE								
Input Power	Model Code	Accessories	CCT	Color Temperature	CRI	System Lumen	System Efficacy	Beam Angle
80W (2ft)	EBTXXHO-XX-8XX-60-ZB <small>(Only for ceiling mounted)</small>	SK- Suspension AD- Adjustable	3000K	Warm White Cool White Daylight	>80	9800lm @ 5000K	123lm/W @ 5000K	60°
120W (3ft)	EBTXXHO-XX-8XX-60-ZBEBTXX <small>(Only for suspension and adjustable)</small>		4000K			5000K	6500K	
160W (4ft)	EBT12HO-160-7XX-60-LR <small>(Only for ceiling mounted)</small>		3000K	4000K	5700K	6500K	21000lm @ 5700K	


** System Lumen variance ± 15% with difference CCT

Dimension


80Watts (2ft)

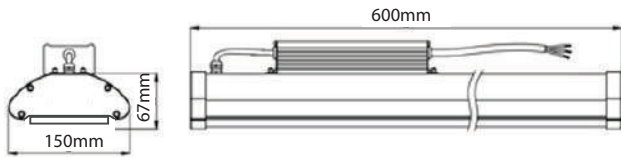

160 Watts (4ft)

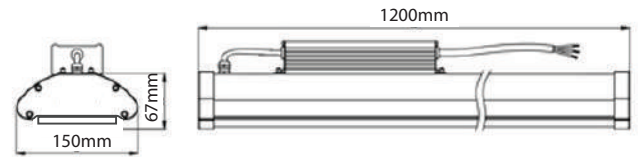

120 Watts (3ft)

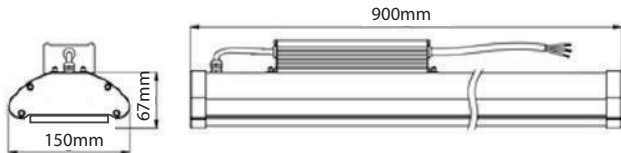

Installation

Suspension



Ceiling-Mounted



Adjustable



Please Read

Operation Manual

This product is recommended to be used within the temperature range of -30~45°C.
Power supply is installed together with the linear highbay. REFER below for the electrical parameter.

Input Voltage	220VAC ~ 240VAC 50/60Hz
Input Type	Direct Main AC AC wire connector type : 3pin (L, N, G)
System Power	80W, 120W, 160W
Power Factor	>0.95

Safety Precautions

1. Do not light out the system without grounding connection.
2. Do not drop the product as it may cause damage to the lens and covering.
3. Do not allow sharp object to impact the top surface of the product as it may cause spark light pattern.
4. Do not cover with insulating matting or similar material on the luminaire.
5. The lighting product must be installed by a qualified electrician. It is the responsibility of the installer, contractor, purchaser or user to install/handle this product in such a manner that comply with all local rules and regulations.

Specifications subject to change without prior notice.